Rostra RearSight
250-8070
Installation Instructions

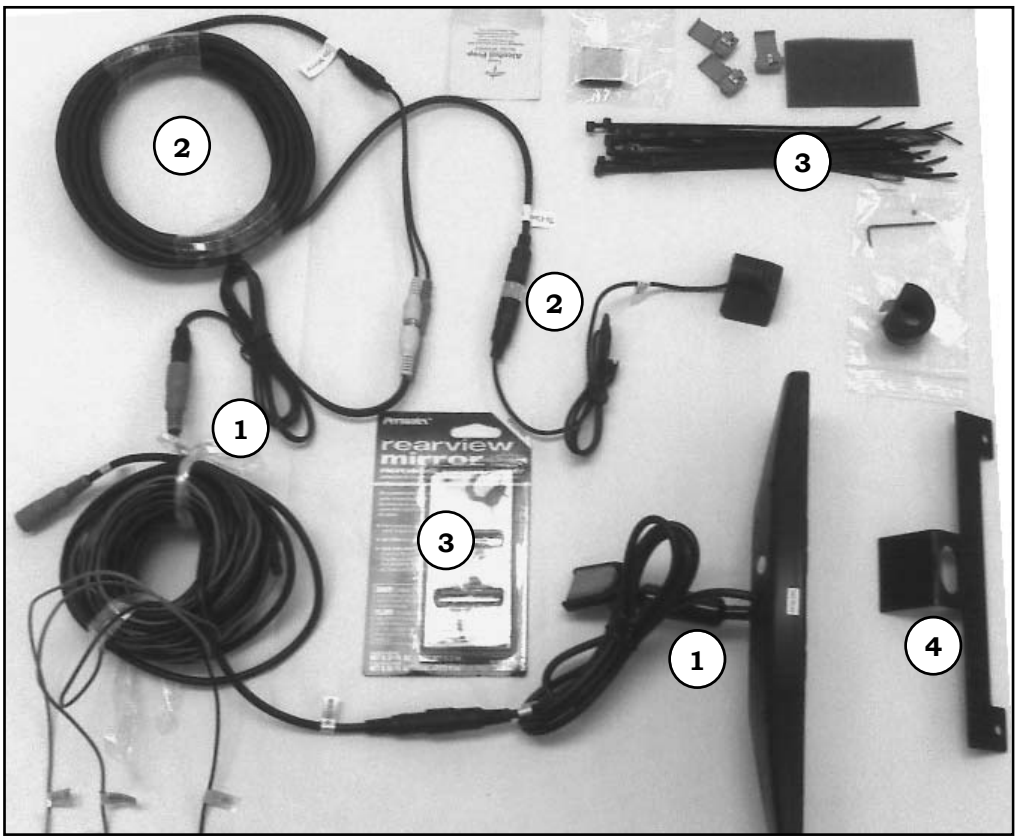

SERVICE PARTS

Item	Qty	Part Number	Description	Contents
1	1	250-8072	Monitor Assembly	Monitor, Monitor Power
				Harness, Adapter Harness,
				Windshield Lug
2	1	250-8112A	Camera Assembly	Camera, Camera Extension
				Harness
3	1	250-8086	Sack Part Assembly	Inline Connectors, Mirror
				Lug Glue, Foam tape, Wire
				Ties, Alcohol Pads
4	1	250-8536	License Plate Bracket	License Plate Bracket

INSTALLATION

1. Mounting the **mirror monitor**
   - **a.** If no lug exists, follow the instructions on the **glue package** found in the **sack part** and attach provided lug to windshield.
   - **b.** Remove current mirror and verify mounting lug is the same as the one in the mounting stem of the monitor.
   - **c.** Mount mirror and tighten **phillips head screw** to fix monitor stem to the lug.
2. **Monitor power harness** must be routed and kept clear of airbags and/or vehicle wiring and antennas.

   Note: failure to route harness properly, may impede proper function of accessory and/or car feature.

   Connect harnesses as shown in kit contents diagram on **Page 1**.
3. The **CCD adapter harness** is used to conver the monitor for use with **CCD cameras**. It may be used in conjunction with the **30ft camera extension harness** or connected directly to the camera using the provided link. Connect **adapter harness** to **Video one** for use in the reverse camera application.
4. The **camera assembly** is fitted with a **shroud** which allows mounting to the **license plate bracket (See Figure 1)**, under the lip of the rear gate or where a horizontal surface is appropriate **(See Figure 2)**. You must clean the area thoroughly with the provided alcohol pad, let dry, then apply direct pressure for **30 seconds** to ensure proper adhesion.
5. The **30ft camera extension harness** is only used when extra length is needed or when a camera connection is outside the vehicle and a **waterproof connection** is required.
6. Utilize the **3 inline connectors** to tie the **red wire** to **accessory power**, the **green wire** to **reverse light power** and the **black wire** to **ground**.
7. See **Figure 1** for orientation of the license plate bracket.
8. See **Form #5086** for Conversion of shroud for shown drill mount. **See Figure 3**

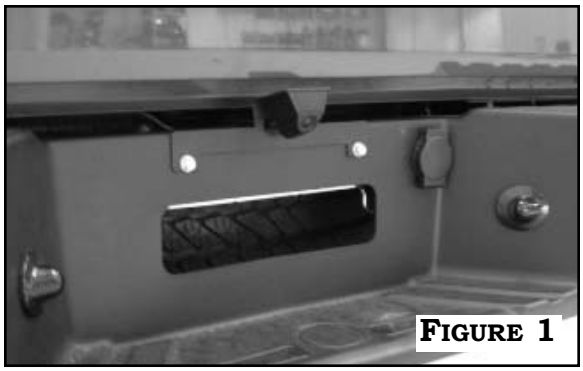

Figure 1

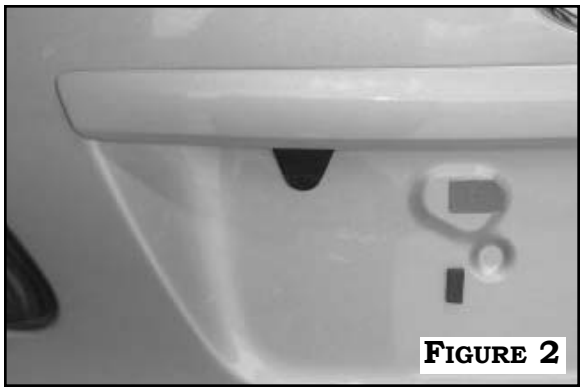

Figure 2

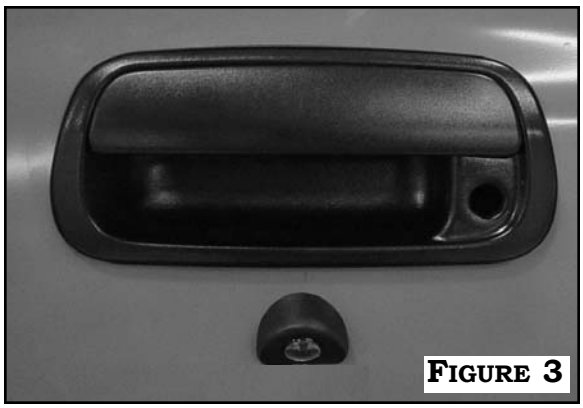

Figure 3