

REARSIGHT CAMERA SYSTEM
***REQUIRES CHRYSLER/DODGE DEALER ACTIVATION**
 250-8407-W Installation Instructions

Parts Identification	Page 1
Vehicle Preparation	Page 1
System Layout	Page 2
Installation	Page 2
Camera Mounting Options/Gridlines	Page 3
Extension Harness Weatherproofing	Page 4
Troubleshooting	Page 4

Parts Identification

Item	Qty.	Part Number	Description
1	1	250-8147	Wedge-mount CMOS camera with extension harness
2	1	250-8598	Sack Parts
3	1	N/A	Interface Harness
4	1	250-8505	DC Adaptor



Vehicle Preparation


***This Kit Requires Dealer Activation. It is recommended that the vehicle be programmed before installation so that the system can be validated before delivery back to the dealer or customer.**

Before beginning your installation, familiarize yourself with the installation instructions and the Rear Sight camera system components.

To ensure your safety (A) apply the emergency brake and (B) read this entire manual before beginning.

	<p>CAUTION: It is advisable to disconnect the negative battery cable for 3 minutes before beginning installation to avoid unintended air bag deployment. Note and record any anti-theft radio codes prior to disconnecting.</p>
---	--

System Layout

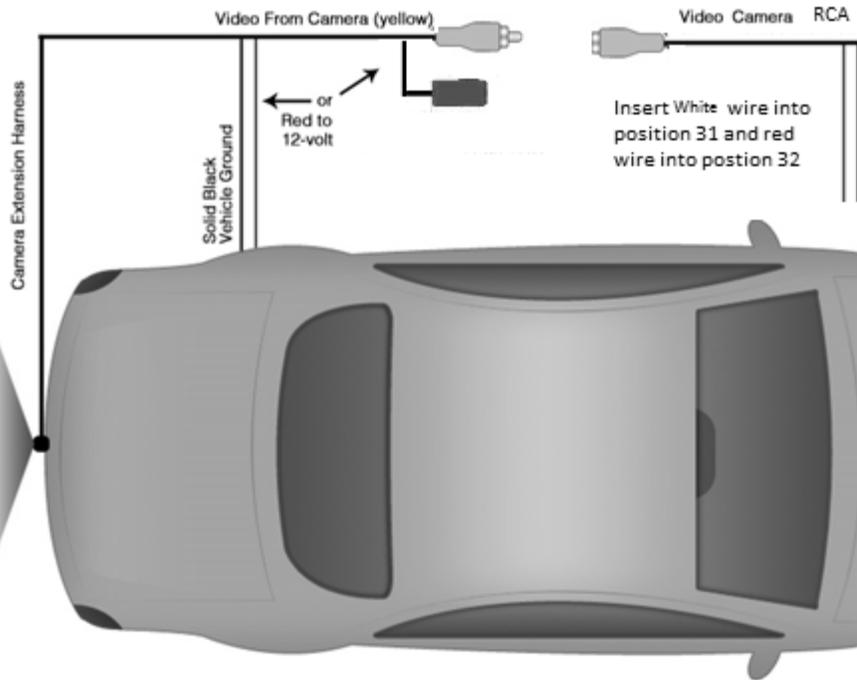

Installation




INSTALLING INTERFACE HARNESS

1. After removing the radio from the dash, remove the 52 pin connector from the behind the radio display.



2. Insert the Red + video wire of the interface adapter harness into pin 31 and the black wire into pin 32 of the 52 pin connector. If the connector has wires in position 31 and 32 cut and splice the adaptor leads into respective positions.

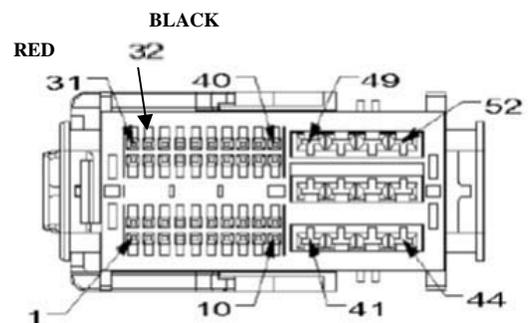

Camera Mounting

1. Locate an area at the rear of the vehicle to mount the camera as close to the centerline of the vehicle as possible. (**Note:** Make sure that the location chosen is accessible from the interior of the vehicle to provide access to the camera extension harness and 4-pin minifit connectors.)
2. Align the supplied drill template to the desired camera mounting location and use a 5/16" (8mm) drill bit to make an opening with which to route the camera extension harness into the vehicle (Note: See camera mounting options on page 3).

3. Attach the pre-formed double-sided adhesive included with this kit to the camera base and insert the camera stud into the previously drilled hole. Press the camera in place lightly in order to complete the next step.
4. Route the camera extension harness through the supplied washer and nut and tighten the nut to the camera stud to securely mount it.
5. Connect the 4-pin minifit connectors of the camera and camera extension harness together (**Note:** See weatherproofing steps on page 4).
6. Route the camera extension harness to the front of the vehicle either above the headliner, underneath the vehicle scuff plates, or outside of the vehicle using the supplied cable ties to secure it to the vehicle body along the way.
7. At the front of the vehicle, connect the male yellow RCA plug of the camera to the female yellow CAMERA RCA plug of the mirror. (**Note:** The second video input of the mirror is not used with this application but is available for a secondary camera.)
8. Connect the **Red Wire** from the camera extension harness to a 12-volt ignition power source either at the fuse panel or to the wire that delivers 12-volts of power when the vehicle switch is turned to the ignition position.
9. Connect the **Black Wire** from the camera extension harness to a vehicle ground point.

Camera Mounting Options

	
Camera Mounting Option 1	Camera Mounting Option 2
<p>If the camera orientation above is desired, make no cuts whatsoever to the Green and White wires attached to the camera harness when completing the installation. This option will provide a properly oriented video feed with gridlines.</p>	<p>If the camera orientation above is desired, the White Wire from the camera harness will need to be cut and isolated in order to flip the video image upright (see below). This option will provide a properly oriented video feed with gridlines.</p>

Camera Gridlines and Video Display Adjustment

	
<p>Cut the White wire and isolate both halves of the wire to flip the video image to match the orientation of the camera (see above).</p>	<p>Cut the Green wire and isolate both halves of the wire to disable the gridlines overlaid onto the video feed of the camera by default.</p>

Extension Harness Weatherproofing

When the camera extension harness is routed along the exterior of the vehicle it is important to use the weatherproofing tape included with this kit to ensure the long-term operation of the camera. Use the following steps to do so:

1. Gently bend the wires around the two minifit connectors so that the two halves of the camera harness are folded over one another and the black wire cover overlaps (Figure 1).
2. Unravel the supplied weatherproofing tape and tightly wrap it around the minifit connectors providing an approximate 2” buffer on each side (Figure 2).
3. Once wrapped, firmly press the tape together (Figure 3).
4. Wrap the weatherproofing tape in a layer of electrical tape to provide an extra buffer against the elements (Figure 4).

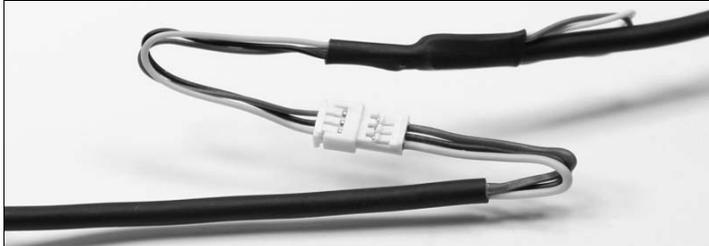


Figure 1



Figure 2



Figure 3



Figure 4

Testing and Reassembly

Testing

1. Reconnect the negative battery cable and torque to 3 ft-lbs.
2. Re-enter any theft deterrent information if applicable.
3. Turn the ignition switch to the ON position.
4. Shift the vehicle into reverse and confirm video feed to your device.

Note: If there is no picture present, re-check all harness connections.

Reassembly

1. Reinstall all trim pieces taking special care to ensure harnesses and wiring connections are properly secured.
2. Make sure no harnesses are bent or pinched by trim pieces.
3. Reconnect all disconnected bulbs and check for function.

Troubleshooting

Mirror/Monitor Not Working	No Video	No Reverse Override
Verify 12-volts to monitor red wire.	Verify extension harness connection to camera.	Check connectivity of green reverse wire.
Verify ground < 10 Ohms resistance.	Verify harnesses are mated correctly at camera.	Verify extension harness connection to camera.
Verify secure connection to monitor extension harness.	Verify 12-volts and ground connection at camera.	

DEALER ACTIVATION INSTRUCTIONS: REAR BACK-UP CAMERA VEHICLE CONFIGURATION

VEHICLE VIN MUST BE UPDATED WITH THE SALES CODE OF THE ADDED ACCESSORY IN ORDER TO ENABLE SYSTEM FUNCTIONALITY. USING THE DEALERCONNECT WEBSITE AND THE STARSCAN DIAGNOSTIC TOOL, COMPLETE THE PROCEDURE BELOW:

1. LOG ON TO [HTTPS://DEALERCONNECT.CHRYSLER.COM](https://dealerconnect.chrysler.com)
2. IN THE "VEHICLE OPTION" SCREEN UNDER THE "GLOBAL CLAIMS SYSTEM" CATEGORY IN THE "SERVICE" TAB, ENTER THE VEHICLE VIN AND ADD THE SALES CODE XAC (PARK VIEW REAR BACK-UP CAMERA) AS A "DEALER INSTALLED OPTION".
3. CONFIRM THAT THE NEW SALES CODE HAS BEEN SUCCESSFULLY ADDED TO THE VIN.
WITH THE STARSCAN DIAGNOSTIC TOOL CONNECTED TO BOTH THE INTERNET (VIA ETHERNET PORT OR WIRELESS CONNECTION AND THE VEHICLE, FOLLOW THE STEPS BELOW:
4. USING THE STARSCAN SELECT THE VEHICLE PREPARATION AND THEN SELECT RESTORE VEHICLE CONFIGURATION.
5. FOLLOW THE STEP BY STEP INSTRUCTIONS ON THE STARSCAN TO COMPLETE THE PARK VIEW REAR BACK-UP CAMERA VEHICLE CONFIGURATION.
6. WHEN THE PARK VIEW REAR BACK-UP CAMERA VEHICLE CONFIGURATION IS COMPLETE, GO TO THE VALIDATION PROCESS TO VERIFY THAT THE VEHICLE HAS BEEN UPDATED.

VALIDATION PROCESS

FROM THE "INITIAL START UP" SCREEN ON THE STARSCAN FOLLOW THE STEPS BELOW:

1. USING THE STARSCAN FOLLOW THE MENU TO ECU VIEW, SELECT TIPMCGW CENTRAL GATEWAY, MORE OPTIONS, ECU DETAILS AND THEN CONFIG INFO
2. VERIFY REAR CAMERA PRESET- - -SET IS PRESENT.

